

1. An alternative to functional-decomposition design is to use object-oriented design(OOD). For the following program, what objects would be useful and what methods (operations on the objects) should each support?

“Write a program to roll two 6-sided dice 1,000 times to determine the percentage of each outcome (i.e., sum both dice). Report the outcome(s) with the highest percentage.” (You only need consider the program’s OOD)

Die: data attributes: #sides, currentRoll
 methods: roll, getRoll
 Tally Sheet: labelList, value with each
 Methods: incrementValue, getLabel

2. Consider the Die and AdvancedDie classes from the Python Summary handout.

a) What data attributes of AdvancedDie are inherited from the parent Die class?

-currentRoll

b) What new data attributes are added as part of the subclass AdvancedDie?

-numSides

c) Which Die class methods are used directly for an AdvancedDie object?

getRoll

d) Which Die class methods are redefined/overridden by the AdvancedDie object?

roll, ~~getRoll~~

e) Which methods are new to the AdvancedDie class and not in the Die class?

~~add, getSides, get, ~~get~~~~

f) If die1 and die2 are AdvancedDie objects, then the statement “if die1 == die2:” invokes the `__eq__` method of AdvancedDie with die1 “passed” as self and die2 passed as rhs_Die.

```
def __eq__(self, rhs_Die):
    """Overrides default '__eq__' operator to allow for deep comparison of dice"""
    return self._currentRoll == rhs_Die._currentRoll
```

What would the code be for AdvancedDie `__le__` method to allow for the “if die1 <= die2:” statement?

```
def __le__(self, rhs_Die):
    return self._currentRoll <= rhs_Die._currentRoll
```

g) Good software engineering practice is to include *precondition* and *postcondition* comments on each method/function where the:

- *precondition* - indicates what must be true for the method to work correctly. Typically, the precondition describes the valid values of the parameters. If the precondition is not satisfied, the method does not need to work correctly!
- *postcondition* - describes the expected state after the method has executed

Consider the AdvancedDie constructor:

```
class AdvancedDie(Die):
    """Advanced die class that allows for any number of sides"""
    def __init__(self, sides = 6):
        """Constructor for any sided Die that takes an the number of sides as a parameter; if no parameter given then default is 6-sided."""
        Die.__init__(self) # call Die parent class constructor
        self._numSides = sides
        self._currentRoll = randint(1, self._numSides)
```

What precondition and postcondition comments should we add?

Precondition: sides must be positive integer
 Postcondition: Initial roll value is between 1 and sides

h) If a method/function has a precondition that is not met when invoked (e.g., die1 = AdvancedDie("six")), why should the method raise an error?

To let programmer know immediately where the error occurred.
 if sides < 1:
 raise(ValueError, "sides must be positive")

2(a) Neater version:

```
def __init__(self, sides = 6):
```

```
    if not isinstance(sides, int):
```

```
        raise(TypeError, "# sides must be an int")
```

```
    if sides < 1:
```

```
        raise(ValueError, "sides must be positive")
```

```
# if it gets here sides is a positive int
```

```
    Die.__init__(self)
```

```
    self._numSides = sides
```

```
    self._currentRoll = randint(1, self._numSides)
```

Classes: A *class* definition is like a blueprint (recepte) for each of the objects of that class.

A class specifies a set of data attributes and methods for the objects of that class

- The values of the data attributes of a given object make up its state
- The behavior of an object depends on its current state and on the methods that manipulate this state
- The set of a class's methods is called its *interface*

The general syntax of class definition is:

```
class MyClass [ ( superClass1 [, superClass2 ]* ) ]:
    '''Document comment which becomes the __doc__ attribute for the class'''
    def __init__(self, [param [, param]*]):
        '''Document comment for constructor method with self be referencing to the object itself'''
        # __init__ body

        # defs of other class methods and assignments to class attributes

# end class MyClass
```

```
"""
File: simple_die.py
Description: This module defines a six-sided Die class.
"""

from random import randint


class Die(object):
    """This class represents a six-sided die"""

    def __init__(self):
        """The initial face of the die."""
        self._currentRoll = randint(1, 6)

    def roll(self):
        """Resets the die's value to a random number
        between 1 and 6."""
        self._currentRoll = randint(1, 6)

    def getRoll(self):
        """Returns the face value of the die."""
        return self._currentRoll


    def __str__(self):
        """Returns the string representation of the die."""
        return str(self._currentRoll)
```

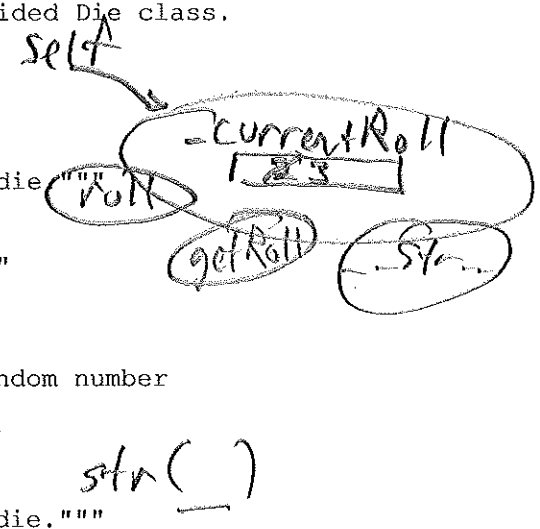

Consider the following script to test the Die class and its associated output:

```
# testDie.py - script to test Die class
from simple_die import Die

die1 = Die()
die2 = Die()
print('die1 =', die1) #calls __str__
print('die2 =', die2)
print()
print('die1.getRoll() = ', die1.getRoll())
print('die2.getRoll() = ', die2.getRoll())
die1.roll()
print('die1.getRoll() = ', die1.getRoll())
print('str(die1): ' + str(die1))
print('die1 + die2:', die1.getRoll() + die2.getRoll())
```

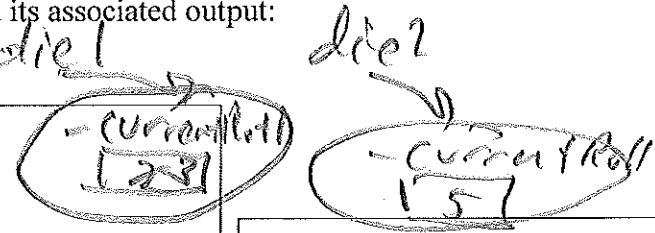

```
>>>
die1 = 2
die2 = 5

die1.getRoll() = 2
die2.getRoll() = 5
die1.getRoll() = 3
str(die1): 3
die1 + die2: 8
>>>
```

Classes in Python have the following characteristics:

- all class attributes (data attributes and methods) are *public* by default, unless your identifier starts with a single underscore, e.g, `self._currentRoll`
- all data types are objects, so they can be used as inherited base classes
- **objects are passed by reference when used as parameters to functions**
- all classes have a set of standard methods provided, but may not work properly (`__str__`, `__doc__`, etc.)
- most built-in operators (+, -, *, <, >, ==, etc.) can be redefined for a class. This makes programming with objects a lot more intuitive. For example suppose we have two Die objects: `die1` & `die2`, and we want to add up their combined rolls. We could use *accessor methods* to do this:

```
diceTotal = die1.getRoll() + die2.getRoll()
```

Here, the `getRoll` method returns an integer (type `int`), so the '+' operator being used above is the one for ints. But, it might be nice to "overload" the + operator by defining an `__add__` method as part of the Die class, so the programmer could add dice directly as in:

```
diceTotal = die1 + die2
```

The three most important features of *Object-Oriented Programming* (OOP) to simplify programs and make them maintainable are:

1. *encapsulation* - restricts access to an object's data to access only by its methods
 - ⇒ helps to prevent indiscriminant changes that might cause an invalid object state (e.g., 6-side die with a of roll 8)
2. *inheritance* - allows one class (the *subclass*) to pickup data attributes and methods of other class(es) (the *parents*)
 - ⇒ helps code reuse since the subclass can extend its parent class(es) by adding addition data attributes and/or methods, or overriding (through polymorphism) a parent's methods
3. *polymorphism* - allows methods in several different classes to have the same names, but be tailored for each class
 - ⇒ helps reduce the need to learn new names for standard operations (or invent strange names to make them unique)

Consider using inheritance to extend the Die class to a generalized AdvancedDie class that can have any number of sides. The interface for the AdvancedDie class are:

Detail Descriptions of the AdvancedDie Class Methods		
Method	Example Usage	Description
<code>__init__</code>	<code>myDie = AdvancedDie(8)</code>	Constructs a die with a specified number of sides and randomly rolls it (Default of 6 sides if no argument supplied)
<code>getRoll</code>	<code>myDie.getRoll()</code>	Returns the current roll of the die (inherited from Die class)
<code>getSides</code>	<code>myDie.getSides()</code>	Returns the number of sides on the die (did not exist in Die class)
<code>roll</code>	<code>myDie.roll()</code>	Rerolls the die randomly (By overriding the <code>roll</code> method of Die, an AdvancedDie can generate a value based on its # of sides)
<code>__eq__</code>	<code>if myDie == otherDie:</code>	Allows <code>==</code> operations to work correctly for AdvancedDie objects.
<code>__lt__</code>	<code>if myDie < otherDie:</code>	Allows <code><</code> operations to work correctly for AdvancedDie objects.
<code>__gt__</code>	<code>if myDie > otherDie:</code>	Allows <code>></code> operations to work correctly for AdvancedDie objects.
<code>__add__</code>	<code>sum = myDie + otherDie</code>	Allows the direct addition of AdvancedDie objects, and returns the integer sum of their current roll values.
<code>__str__</code>	Directly as: <code>myDie.__str__()</code> <code>str(myDie)</code> or indirectly as: <code>print myDie</code>	Returns a string representation for the AdvancedDie. By overriding the <code>__str__</code> method of the Die class, so the "print" statement will work correctly with an AdvancedDie.

Consider the following script and associated output:

```
# testAdvancedDie.py - script to test
AdvancedDie class
from advanced_die import AdvancedDie

die1 = AdvancedDie(100)
die2 = AdvancedDie(100)
die3 = AdvancedDie()

print( 'die1 =', die1 )      #calls __str__
print( 'die2 =', die2 )
print( 'die3 =', die3 )

print( 'die1.getRoll() = ', die1.getRoll() )
print( 'die1.getSides() = ', die1.getSides() )
die1.roll()
print( 'die1.getRoll() = ', die1.getRoll() )
print( 'die2.getRoll() = ', die2.getRoll() )
print( 'die1 == die2:', die1==die2 )
print( 'die1 < die2:', die1<die2 )
print( 'die1 > die2:', die1>die2 )
print( 'die1 != die2:', die1!=die2 )
print( 'str(die1): ' + str(die1) )
print( 'die1 + die2:', die1 + die2 )

help(AdvancedDie)
```

```
die1 = Number of Sides=100 Roll=32
die2 = Number of Sides=100 Roll=76
die3 = Number of Sides=6 Roll=5
die1.getRoll() = 32
die1.getSides() = 100

die1.getRoll() = 70
die2.getRoll() = 76
die1 == die2: False
die1 < die2: True
die1 > die2: False
die1 != die2: True
str(die1): Number of Sides=100 Roll=70
die1 + die2: 146
Help on class AdvancedDie in module
advanced_die:

class AdvancedDie(simple_die.Die)
| Advanced die class that allows for
| any number of sides
|
| Method resolution order:
|   AdvancedDie
|   simple_die.Die
|   __builtin__.object
|
| Methods defined here:
```

Notice that the `testAdvancedDie.py` script needed to import `AdvancedDie`, but not the `Die` class.

The AdvancedDie class that inherits from the Die superclass.

```
"""
File: advanced_die.py
Description: Provides a AdvancedDie class that allows for any number of sides
Inherits from the parent class Die in module die_simple
"""
from simple_die import Die
from random import randint

class AdvancedDie(Die):
    """Advanced die class that allows for any number of sides"""

    def __init__(self, sides = 6):
        """Constructor for any sided Die that takes an the number of sides
        as a parameter; if no parameter given then default is 6-sided."""

        Die.__init__(self)          # call Die parent class constructor
        self._numSides = sides
        self._currentRoll = randint(1, self._numSides)

    def roll(self):
        """Causes a die to roll itself -- overrides Die class roll"""
        self._currentRoll = randint(1, self._numSides)

    def __eq__(self, rhs_Die):
        """Overrides default '__eq__' operator to allow for deep comparison of Dice"""
        return self._currentRoll == rhs_Die._currentRoll

    def __lt__(self, rhs_Die):
        """Overrides default '__lt__' operator to allow for deep comparison of Dice"""
        return self._currentRoll < rhs_Die._currentRoll

    def __gt__(self, rhs_Die):
        """Overrides default '__gt__' operator to allow for deep comparison of Dice"""
        return self._currentRoll > rhs_Die._currentRoll

    def __str__(self):
        """Returns the string representation of the AdvancedDie."""
        return 'Number of Sides='+str(self._numSides)+' Roll='+str(self._currentRoll)

    def __add__(self, rhs_Die):
        """Returns the sum of two dice rolls"""
        return self._currentRoll + rhs_Die._currentRoll

    def getSides(self):
        """Returns the number of sides on the die."""
        return self._numSides
```